

PWD WALL MOUNTED TROUGH

4.01

TROUGHS

#US-TPWD / PWD WALL MOUNTED TROUGH



features and benefits

- Concealed tapware connections
- Standard and custom lengths
- Custom manufactured to any length between 600mm and 6000mm
- 50mm waste & wall brackets supplied
- Grade 304 SS (1.2mm -16/18 gauge)
- Left or right hand waste position
- Radius internal corners - easy cleaning
- Radius external corners - added safety
- Ideal for schools, kindergartens, factories and public amenities

about

The *BRITEX Stainless Steel PWD Wall Mounted Trough* can be used as either a drinking or wash trough. Fully welded, rounded corners both internally and externally ensure easy cleaning and provide added safety in high traffic areas. A 50mm hob in the splashback eliminates the need for rear wall penetrations and conceals all tapware connections. The PWD trough is supplied with heavy duty wall brackets and/or legs.

sample spec. text

BRITEX S.S. PWD Wall Mounted Trough - XXXXmm Long. Complete with radius internal and external bowl corners, wall brackets, 50mm left/right hand waste outlet - Product Code US-TPWD-X

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT [BRITEXUSA.COM](https://www.britexusa.com) TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE.

PWD WALL MOUNTED TROUGH

PRODUCT CODE

US-TPWD

HOW TO SPECIFY: PWD Wall Mounted Trough

Sample Specification Code

A B C D
US-TPWD - 1500 - WB - R

= PWD Wall Mounted Trough, 1500mm long, Brackets only, Right Hand Waste

Specification Key

A = Product Code

B = Trough Length (mm)

C = Support Options

WB : Brackets only

BL : Brackets and Legs

D = Waste Outlet Position

L : Left Hand Waste


R : Right Hand Waste

Common Trough and Tap Combinations:


900mm - 2 taps	1500mm - 3 taps	2400mm - 6 taps
1200mm - 3 taps	1800mm - 4 taps	3000mm - 8 taps

Suggested Mounting Heights (mm)

	infant	primary	secondary
wash	550	650	700
drink	550	700	900




MODEL US-TPWD Section

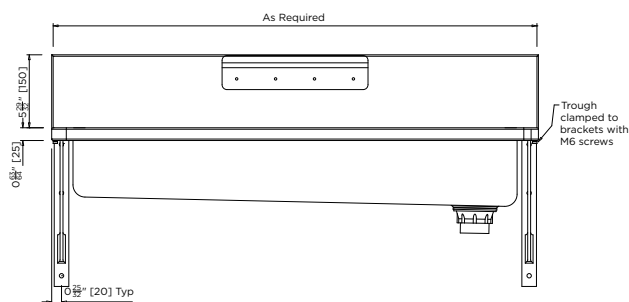

Troughs over 2000mm long are supplied with a centre support bracket

MODEL US-TPWD Front Elevation

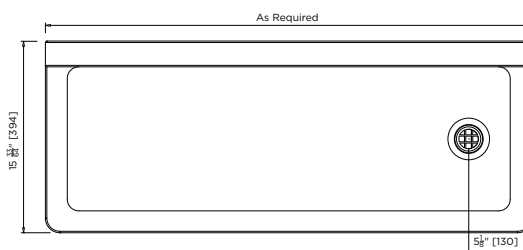

MODEL US-TPWD Plan

When specifying this product please include:

- Product **Name** and **Code**
- Product **Dimensions**
- Position of **Waste Outlet** (left/right)

specifying guide

options

- Upstand to side(s)
- Support legs
- Custom trough dimensions
- Custom splashback height
- Left or right hand waste

VISIT BRITEXUSA.COM TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE.