TIMED FLOW PUSH BUTTON BASIN SET (COLD ONLY)

WATER RATING
www.waterrating.gov.au
The more stars the more water efficient
3.0 litres per minute
In accordance with AS/NZS 6400
Licence No. 0140
Galvin Engineering Pty Ltd

WELS REG # T31877

WaterMark ™
AS/NZS 3718 Lic. WMKA0034
SAI Global

features and benefits

- Ligature resistant, low profile design
- Heavy duty construction
- WELS and WaterMark certified
- Single and dual temperature sets

- Timed flow and mixer sets
- Water efficient
- Concealed fixings
- 15 second concealed time flow cartridge

about

BRITEX security tapware is designed for use in correctional facilities such as prisons, police stations and detention centres as well as amenities prone to high levels of vandalism and potential self-harm. Common features of the range include resistance to force, ligature resistance, reduced leverage through low-profile design and radius edges to prevent self-harm. The security tapware range offered by BRITEX has been methodically selected to complement specific stainless steel fixtures within the Britex range. The security tapware we supply is sourced from some of Australia's most respected suppliers of commercial tapware. Manufactured from DR brass and heavy duty in construction, these taps can withstand high degrees of wear and tear and provide maximum vandal resistance. We are proud to offer these premium quality taps in conjunction with our own first class fixtures.

sample spec. text

Timed Flow Push Button Basin Set (Cold Only)- Product Code: TW-SEC-01

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT **BRITEX.COM.AU** TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.
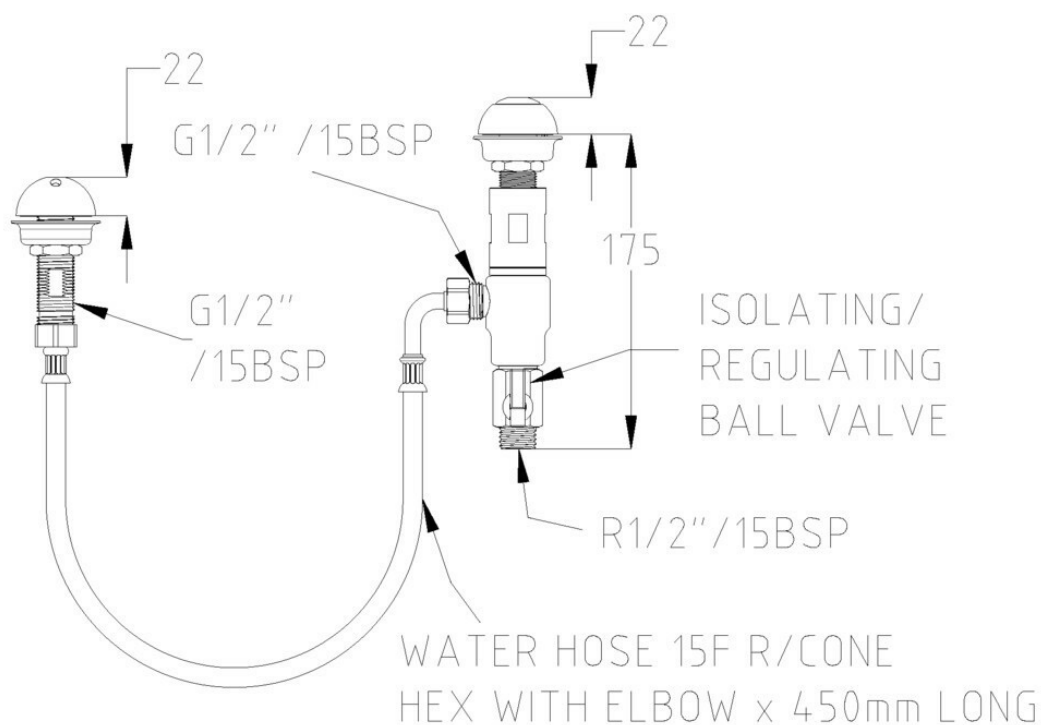
TIMED FLOW PUSH BUTTON BASIN SET (COLD ONLY)

PRODUCT CODE

TW-SEC-01

technical information

WELS: 6 Star Rating (3L/min)
Nominal Flow Rate (LPM): 2.55
WaterMark: AS/NZS 3718 Lic. WMKA0034
Inlet: 1/2" BSP - Male
Outlet: Dome Outlet
Headwork: Time flow cartridge
Working Pressure Range (kPa): 100 Min - 500 Max
Working Temperature Range (°C): 5 Min - 70 Max
Finish: Chrome

22
G1/2" /15BSP
G1/2" /15BSP
22
175
ISOLATING/ REGULATING BALL VALVE
R1/2"/15BSP
WATER HOSE 15F R/CONE HEX WITH ELBOW x 450mm LONG

specifying guide

When specifying this product please include:

• Product Name and Code

VISIT **BRITEX.COM.AU** TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023

BRITEX
innovating since 1938