

# HOB MOUNTED SINK SET WITH FIXED SPOUT



WELS REG # T09990



## features and benefits

- Vandal resistant
- Optional fixed or swivel spout
- Standard with jumper valve
- Heavy duty bright CP finish
- WaterMark and WELS certified
- Locking ring on handle
- Ideal for education projects
- Easy to install
- Adjustable breech piece
- Gooseneck fixed spout
- Complies with NSW Education EFSG Guidelines

## about

Vandal resistant hob mounted tapware. Handles feature locking ring to secure handle to spindle, removable only with a key provided. Heavy duty bright CP finish. Perfect for education facilities and busy public amenities.

## sample spec. text

*Britex Hob Mounted Sink Set with Fixed Spout - Product Code: TW-SET-02*

\*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT [BRITEX.COM.AU](http://BRITEX.COM.AU) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



**MELBOURNE**  
Britex Place, Mirra Crt  
Bundoora VIC 3083  
t (03) 9466 9000  
f (03) 9466 9044

**SYDNEY**  
16 Northumberland Drv  
Taren Point NSW 2229  
t (02) 9531 2100  
f (02) 9531 2800

**PERTH**  
Unit 1/8 Principal Link  
Malaga WA 6090  
t (08) 9249 5464  
f (08) 9248 6893

**BRISBANE**  
19 Manilla St  
East Brisbane QLD 4169  
t (07) 3363 2400  
f (07) 3363 2444

**ADELAIDE**  
The Britex Group  
SA State Office  
t 1300 764 744  
f 1300 784 306

[britex.com.au](http://britex.com.au) | [sales@britex.com.au](mailto:sales@britex.com.au) | A.B.N 83 004 309 737


# HOB MOUNTED SINK SET WITH FIXED SPOUT

PRODUCT CODE

## TW-SET-02

technical  
information

**WELS:** 5 Star Rating (6L/min)  
**Nominal Flow Rate (LPM):** 5.8  
**WaterMark:** AS/NZS 3718 Lic. WMKA0034  
**Inlet:** 15 CU / 1/2" BSP  
**Outlet:** Aerator  
**Headwork:** Jumper Valve  
**Working Pressure Range (kPa):** 100 Min - 500 Max  
**Working Temperature Range (°C):** 5 Min - 80 Max  
**Finish:** Chrome

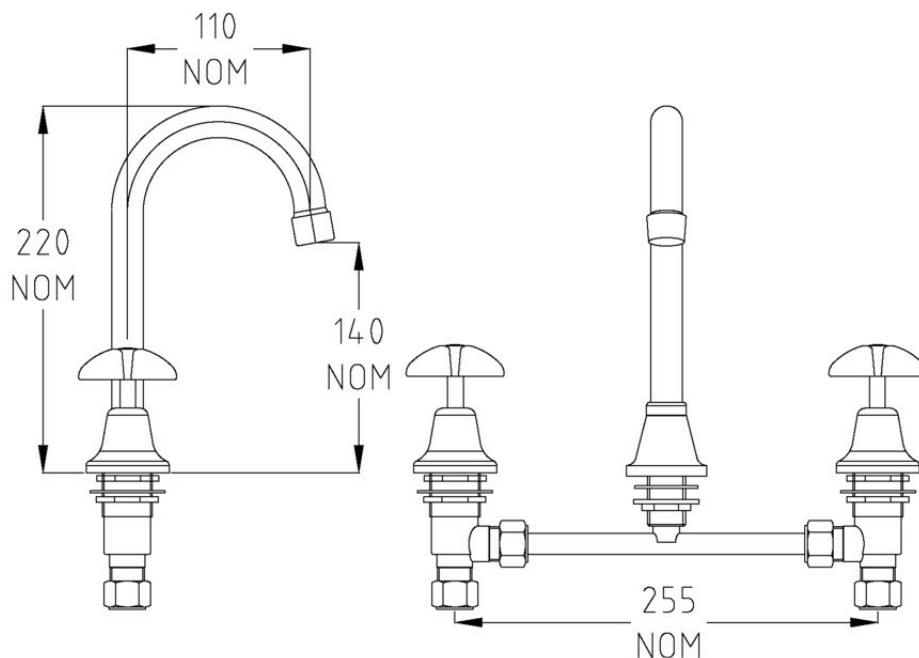

specifying  
guide

*When specifying this product please include:*

- Product Name and Code

VISIT [BRITEX.COM.AU](http://BRITEX.COM.AU) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023