

# Ablution Trough



## TABL TABL-U

Scan QR code  
to view our  
installation notes




### To order this item please advise:


- Configuration: TABL (no splashback) or TABL-U (with splashback)
- Trough length: 1200, 1500, 1800, 2400 or custom
- Waste position: Left or Right
- Tap quantity and code (if required)

### Product Info:

- Available pre-plumbed with tapware
- Optional splashback conceals tapware plumbing
- Standard and custom lengths
- Radius internal corners
- Wall brackets and 50mm waste supplied

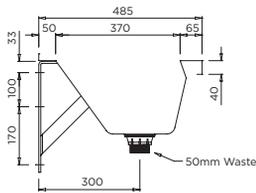

TABL

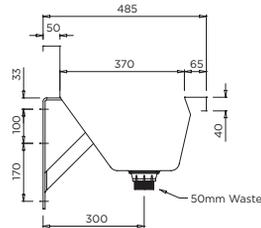

TABL-U

## INSTALLATION NOTES


1) Fixture strength is ultimately determined by the load capacity of the supporting structure (noggin recommended for stud wall construction) and use of appropriate fixings (i.e. sleeve anchors for masonry walls).  
 2) Trough is mounted to wall via two end brackets (inserted into end fascias of trough).  
 3) A centre bracket that supports the underside of the fixture is supplied for troughs over 2000mm.  
 4) To further secure the trough to the rear wall and to prevent shifting of the brackets once screws have been tightened, an adhesive tape or silicon can be applied to the rear tile flange and to the underside of the end fascia where it is in contact with the bracket.  
 5) Front support legs supplied only by specific request.

**For model TABL:** screw holes may also be drilled near the top of the rear splashback if desired.


**For model TABL-U:** an offset bracket is supplied to secure to the rear of the splashback to the wall

## Suggested Mounting Heights (mm)


	infant	primary	secondary
wash	550	650	700

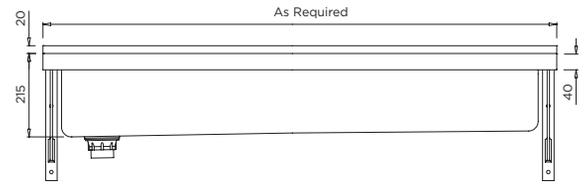


Troughs over 2000mm long are supplied with a centre support bracket

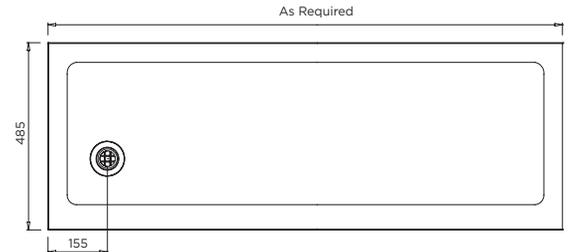

TABL

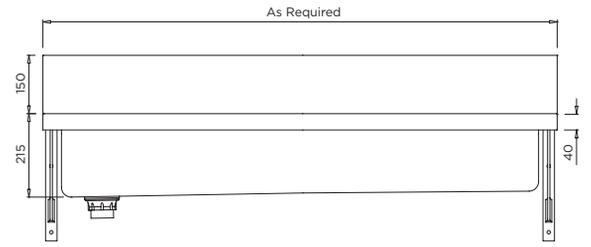

Troughs over 2000mm long are supplied with a centre support bracket

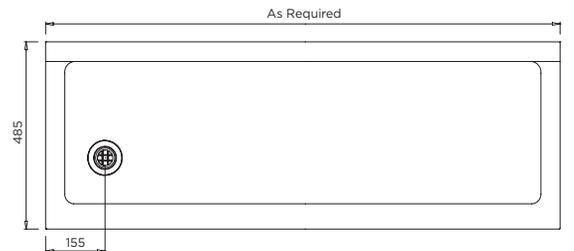

TABL-U