
CSB & CSL

Cleaner's Sink Brackets and Brackets and Legs

Installation Guide



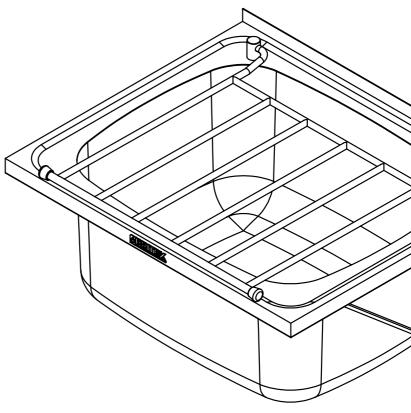

PERTH

BRISBANE

IMPORTANT

ALL SERVICE TO BE PERFORMED BY AN AUTHORISED SERVICE PERSON

Installation of this unit must be in accordance with AS/NZS 3500.1, AS/NZS 3500.2, the PCA and the local regulatory requirements. Water and/or electrical supply conditions must comply to national or state requirements and standards. Failure to comply shall void the product warranty and may affect the performance of the product. For further support and after-sales care, please contact Britex.

⚠ WARNING

WHEN INSTALLATION IS COMPLETE, ENSURE THESE INSTRUCTIONS REMAIN INSIDE THE PLASTIC BAG PROVIDED WITH THE UNIT FOR FUTURE REFERENCE

About

The BRITEX Stainless Steel Cleaner's Sink consists of an extra large grade 304 stainless steel 46 litre tub and a robust stainless steel hinged grate for support and storage of buckets. This is an extremely sturdy, heavy duty product designed to handle significant wear and tear. Available with wall brackets (Model CSB), or with wall brackets and adjustable front legs (Model CSL). Additional splashback (up to 900mm high) optional.

Preparation and Completion Notes

Contractors please note: Ideally, stainless steel cleaner sinks should be installed after all other building activities that could cause contamination to the surface of the stainless steel have been completed.


These activities include:

Using proprietary building mortar removers containing hydrochloric acid. Welding, cutting and grinding that may 'spray' carbon steel and iron particles onto the stainless-steel surface.

- 1. Remove sink from box packaging and inspect for any damage before beginning installation process.
- 2. Confirm all requested details are correct.
- 3. If the sink is damaged in transit or if any details are not as requested, do not install it. Notify Britex immediately within 24 hours of receipting the product.




CSB & CSL Drawing

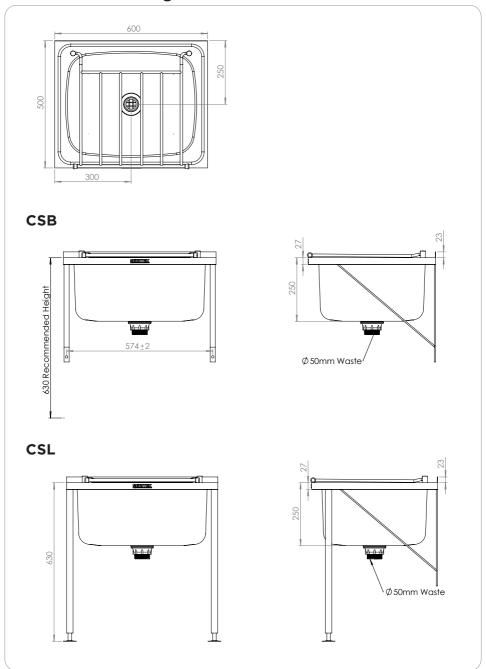


Installation Instructions

- 1. Mark a level, horizontal line on the wall at the desired height for the sink to be installed.
- 2. Mark the hole centres for the brackets and secure to wall with appropriate fixings.
- 3. Slide sink onto brackets and fix in place using bolts at the rear the screw into grate posts.
- 4. An Allen key and 2 lengths of thread will be supplied with the cleaners sink.
- 5. If no legs are required, the shorter thread is used to pin the front of the bracket to the sink through the tapped hole in the front corner gussets. (1 & 2)

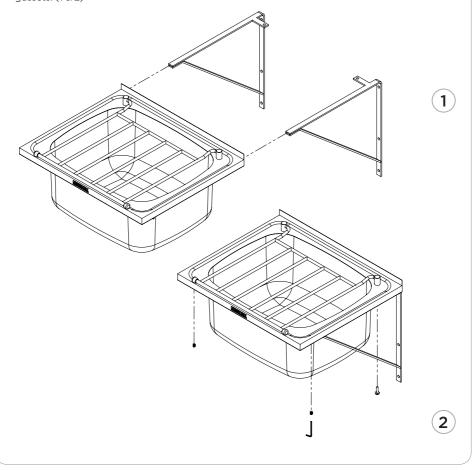

Installation Instructions

- 6. If legs are required, the longer thread is used to pin the brackets to the cleaners sink through the tapped holes in the front corner gussets.
- 7. Adjust the feet of the legs to allow them to be screwed onto the longer thread.
- 8. Adjust the feet back to the ground and secure using appropriate fixings. (3)
- 9. The sink is supplied with a 50mm waste and is now ready to be plumbed. (Trap not supplied)

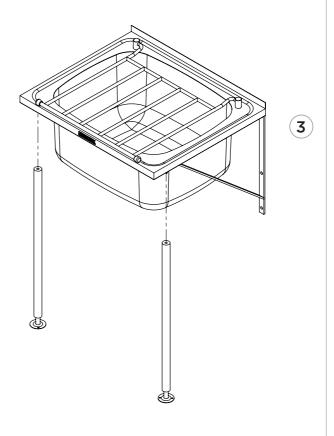

Care and Maintenance

Stainless steel products should be kept clean at all times. The secret to stainless steel's ability to maintain a high-quality finish and promises of a long-life expectancy is the invisible chromium-oxide film that sits on the surface and protects the steel beneath. To maintain this film, it is essential that the surface remains clean and in constant contact with oxygen. If this film is penetrated (either by abrasion or chemically) and dirt, liquid, grime contaminants embed themselves in these micro chasms for an extended period, the chromium oxide film will not be able to regenerate and the steel below will eventually become damaged and discoloured.

What we recommend for general cleaning and maintenance:

Cleaning Materials:

- · A soft cloth
- A soft-bristled brush
- · A natural or artificial sponge

Cleaning Solutions:

- Hand washing soap / soft water solution
- Mild soap / soft water solution

White vinegar / soft water solution

It is recommended that general cleaning of stainless-steel surfaces be carried out weekly, or as soon as a build-up of surface media has been observed. To clean, simply wash stainless steel surfaces with, warm, diluted, mild soapy water using a cloth or soft bristled brush. Once all dirt, oil and grime is removed, rinse thoroughly with clean water and wipe dry.



Warranty

The BRITEX product is backed by our manufacturer's warranty available for download from our website at www.britex.com.au. We expressly warrant that the product is free from operational defects in workmanship and materials for the warranty period indicated on the schedule in the manufacturer's warranty. During the warranty period, BRITEX will repair or replace any defective products manufactured by BRITEX at no charge, provided that the terms of the manufacturer's warranty are followed.

This warranty is the only warranty given by BRITEX, and we expressly disclaim all other warranties, including but not limited to implied warranties of merchantability and fitness for a particular purpose. This warranty represents the sole and exclusive remedy for breach of warranty, and BRITEX shall not be liable for any incidental, special, or consequential damages, including lost profits, labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, chemical, electrical or any other circumstances beyond BRITEX's control.

This warranty shall be void if the product is abused, misused, improperly installed, maintained, or altered. By purchasing our product, you agree to these terms and conditions. We appreciate your business and look forward to providing you with high-quality products and services.

