# WALL HUNG URINAL TROUGH

ASME: A112.19.2 ASME: A112.19.3 IAPMO IGC 313







- High efficiency urinal
- 1.5L Water Consumption per stall length (600mm)
- Left or Right hand 50mm outlet
- Standard lengths
- IAPMO certified

- Supplied with top or rear water inlet
- Quick and easy to install
- Suited to portable buildings and public amenities
- Grade 304 SS (1.2mm -16/18 gauge)



The BRITEX Wall Hung Urinal Trough is manufactured from 1.2mm heavy duty stainless steel and is ideal for site sheds, portable buildings and ablution blocks. Easy to install and compatible with assorted Britex flushing systems, the Britex Wall Hung Urinal Trough comes in standard sizes (600, 1200. 1800, 2400 and 3000mm).



BRITEX S.S. Wall Hung Urinal Trough IAPMO certified - XXXXmm Long. Radiused internal C orners. Top/rear water inlet and 50mmleft/right hand waste outlet - Product Code UTRO-XXXX-X-X

\*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEXUSA.COM TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE



## WALL HUNG URINAL TROUGH

PRODUCT CODE

## **US-UTRO**

### HOW TO SPECIFY: Wall Hung Urinal Trough

Sample Specification Code

= Wall Hung Urinal Trough, 71"[1800mm] Long , Right Hand Waste. Top Entry

#### Specification Key

- A = Product Code
- B = Urinal Length (mm)
- C = Waste Outlet Position L : Left Hand Waste R : Right Hand Waste
- D = Water Entry Type
  T: Top Entry
  R: Rear Entry

#### Water Inlets for Urinals:

One water inlet is required for every 2000mm of Urinal, or part thereof.

e.g. 23"[600mm], 47"[1200mm] 71"[1800mm] = 1 inlet 94"[2400mm], 118"[3000mm] = 2 inlets

#### Standard Sizes:


23"[600], 47"[1200], 71"[1800],94"[ 2400], 118"[3000mm]

#### **Suggested Mounting Heights:**

Dimension from finished floor to front edge/rim of urinal

Adults - 24"[610] // Juniors - 20"[510]

NB: Heights are suggestions only, subject to suitability of users for each individual project.

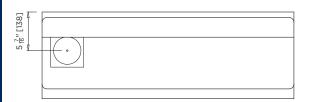


#### MODEL US-UTRO Plan

specifying


guide

### When specifying this product please include:

- Product Name and Code
- Product Length
- Position of Waste (left or right)
- Top or rear Water Entry

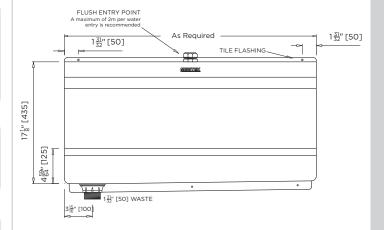

#### MODEL US-UTRO Front Elevation

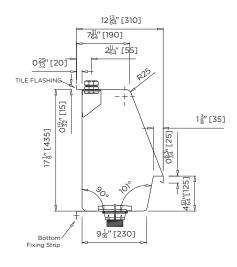

Please note: Rear water entry assembly (where required) will extend past back of unit.

#### MODEL US-UTRO Section



- Top or rear water entry
- Outlet position left or right
- Removable shroud to conceal waste connection

VISIT **BRITEXUSA.COM** TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE

Last Revised Nov 2022

