


WALL HUNG URINAL TROUGH

ASME: A112.19.2
ASME: A112.19.3



features and benefits

- High efficiency urinal
- 1.5L Water Consumption per stall length (600mm)
- Left or Right hand 50mm outlet
- Standard lengths
- Supplied with top or rear water inlet
- Quick and easy to install
- Suited to portable buildings and public amenities

about

The *BRITEX Wall Hung Urinal Trough* is manufactured from 1.2mm heavy duty stainless steel and is ideal for site sheds, portable buildings and ablution blocks. Easy to install and compatible with assorted Britex flushing systems, the Britex Wall Hung Urinal Trough comes in standard sizes (600, 1200, 1800, 2400 and 3000mm).

sample spec. text

BRITEX S.S. Wall Hung Urinal Trough UPC Certified to IGC 313 - XXXXmm Long. Radiused internal Corners. Top/rear water inlet and 50mm left/right hand waste outlet - Product Code UTRO-XXXX-X-X

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEXUSA.COM TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE.

WALL HUNG URINAL TROUGH

PRODUCT CODE

US-UTRO

HOW TO SPECIFY: Wall Hung Urinal Trough

Sample Specification Code

A **B** **C** **D**
US-UTRO - 1800 - R - T

= Wall Hung Urinal Trough, 71"[1800mm] Long, Right Hand Waste, Top Entry

Specification Key

A = Product Code **D = Water Entry Type**
B = Urinal Length (mm) **T : Top Entry**
C = Waste Outlet Position **R : Rear Entry**
L : Left Hand Waste
R : Right Hand Waste

Water Inlets for Urinals:

One water inlet is required for every 2000mm of Urinal, or part thereof.

e.g. 23"[600mm], 47"[1200mm] 71"[1800mm] = 1 inlet
 94"[2400mm], 118"[3000mm] = 2 inlets

Standard Sizes:


23"[600], 47"[1200], 71"[1800], 94"[2400], 118"[3000mm]

Suggested Mounting Heights:


Dimension from finished floor to front edge/rim of urinal

Adults - 24"[610] // Juniors - 20"[510]

NB: Heights are suggestions only, subject to suitability of users for each individual project.

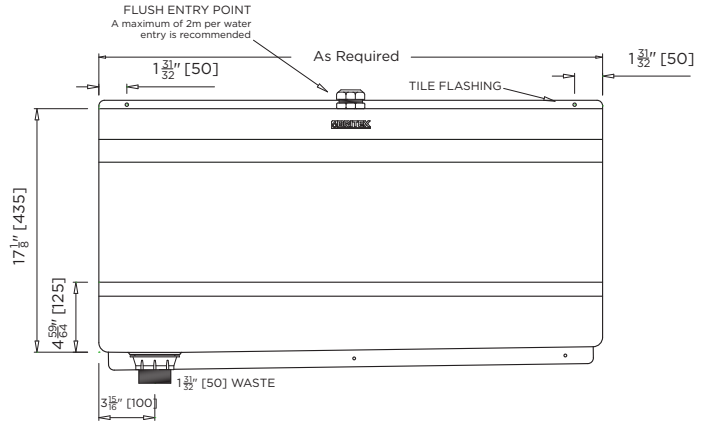


MODEL US-UTRO Front Elevation

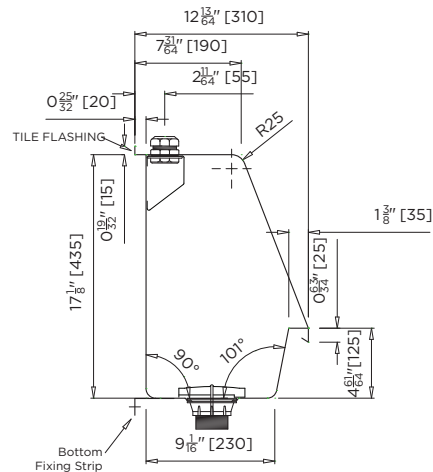

Please note: Rear water entry assembly (where required) will extend past back of unit.

MODEL US-UTRO Section

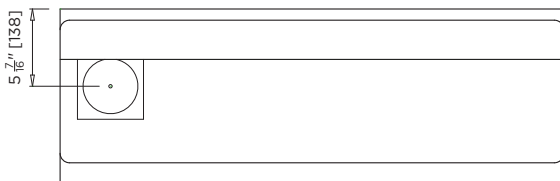

MODEL US-UTRO Plan

When specifying this product please include:

- Product **Name** and **Code**
- Product **Length**
- Position of **Waste** (left or right)
- Top or rear **Water Entry**

specifying guide

options

- Top or rear water entry
- Outlet position - left or right
- Removable shroud to conceal waste connection

VISIT BRITEXUSA.COM TO DOWNLOAD THE MOST CURRENT PRODUCT LITERATURE.



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.