# **SANISTEP URINAL**







Image shows Recessed Sanistep Urinal.

Floor Mounted Model is supplied with a kick plate.



- · WELS and WaterMark certified
- Recessed or floor mounted models
- Vandal resistant design
- Manufactured to custom lengths
- Compatible with BRITEX Sensor Flush Systems
- · Hinged grate for ease of cleaning
- Water saver sparge system
- Available in 'L' or 'U' shaped configurations



The BRITEX Sanistep Urinal is the most frequently specified stainless steel urinal in Australia and can be found in many of Australia's iconic sports and entertainment stadiums. Manufactured from durable 1.2mm grade 304 stainless steel, Sanistep urinals are hand fabricated and fully welded with sturdy reinforcement to the rear, providing a sound structural finish. Sanistep urinals incorporate a hinged floor grate to allow for ease of cleaning and feature our unique weir style sparge, which enables the water to flush in an even flow with minimum water and maximum efficiency. WaterMark and WELS certified as required by plumbing regulations and government legislation.



BRITEX S.S. Recessed/Floor Mounted Sanistep Urinal - XXXXmm Long. WELS rating and WaterMark Level 1 certified. Complete with hinged floor grate and BRITEX Smart SaniFlush Sensor System - Product Code USAN

\*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE



MELBOURNE Britex Place, Mirra Crt Bundoora VIC 3083 t (03) 9466 9000 SYDNEY

16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
e nsw@britex.com.au

PERTH Unit 1/8 Principal Link Malaga WA 6090 t (08) 9249 5464 BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
e sa@britex.com.au

# **SANISTEP URINAL**

PRODUCT CODE

## USAN



Sample Specification Code

A B C D E F

= Sanistep Urinal, 1800mm Long, Recessed, Rear Entry, 100mm Left Hand Waste

### Specification Key

- A = Product Code
- B = Urinal Length (mm)
- C = Mounting Options FM: Floor Mounted
- RE: Recessed

  D = Entry Point
  T: Top Entry
  R: Rear Entry
- E = Waste Outlet Size 100 : 100mm
- F = Waste Outlet Position
- L : Left Hand Waste R : Right Hand Waste

### Water Inlets for Urinals:

One water inlet is required for every 1800mm of Urinal, or part thereof.

e.g. 600mm - 1800mm = 1 inlet 1801mm - 3600mm = 2 inlets 3601mm- 5400mm = 3 inlets

### Standard sizes:

1500mm, 1800mm, 2000mm, 2400mm

# As Required As Required As Required As Required An maximum of 1.8m per water entry is recommended OVE OVE WASTE & COVER STEP ON GRATING


MODEL USAN Plan

specifying


guide

# When specifying this product please include:

- Product Name and Code
- Product Length
- · Recessed or Floor Mounted
- Top or rear Water Entry
- Size and position of Outlet



### MODEL USAN Front Elevation

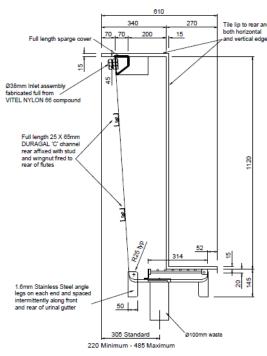

Recommended floor cut out for recessed model is 650W x 160D x Urinal Length

MODEL USAN Typical Section (Recessed Model)



- 'L' and 'U' shaped configuration
- Smart SaniFlush Sensor System: pg 3.01
- Outlet size: 100mm or custom
- Outlet position (left/right end preferred)
- Inlet size 38mm
- Free standing ends (if not between walls)
- Type 316 S.S. (Export models)
- · Joining strip for joining modular lengths

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Mar 2024 | D



